


20N65SFMF


20 Amps,650 Volts N-Channel Super Junction Power MOSFET

FEATURE

- 20A,650V, $R_{DS(ON)MAX}=190m\Omega$ @ $V_{GS}=10V/5.5A$
- Low gate charge
- Low C_{iss}
- Fast switching
- 100% avalanche tested
- Improved dv/dt capability
- Ultra-fast body diode
- RoHS 2.0 Compliant



TO-220MF-3L

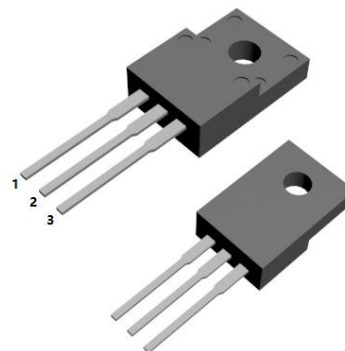

Absolute Maximum Ratings($T_C=25^{\circ}C$, unless otherwise noted)

Parameter	Symbol	20N65SFMF	UNIT
Drain-Source Voltage	V_{DS}	650	V
Gate-Source Voltage	V_{GS}	± 20	
Continuous Drain Current	I_D	20	A
Pulsed Drain Current(Note1)	I_{DM}	60	
Single Pulse Avalanche Energy (Note 2)	E_{AS}	80	mJ
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-55 to +150	$^{\circ}C$
Maximum lead temperature for soldering purposes, 1/8" from case for 5 seconds	T_L	260	$^{\circ}C$

Thermal Characteristics


Parameter	Symbol	20N65SFMF	Units
Maximum Junction-to-Case	R_{thJC}	3.85	$^{\circ}C/W$
Maximum Power Dissipation	P_D	33	W

Electrical Characteristics (T _c =25°C,unless otherwise noted)						
Parameter	Symbol	Test Conditions	Min	Typ	Max	Units
Off Characteristics						
Drain-Source Breakdown Voltage	BV _{DSS}	V _{GS} =0V,I _D =250uA,T _C =25℃	650	—	—	V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} =650V,V _{GS} =0V	—	—	10	μ A
Gate-Body Leakage Current,Forward	I _{GSSF}	V _{GS} =20V,V _{DS} =0V	—	—	100	nA
Gate-Body Leakage Current,Reverse	I _{GSSR}	V _{GS} =-20V,V _{DS} =0V	—	—	-100	nA
On Characteristics						
Gate-Source Threshold Voltage	V _{GS(th)}	V _{DS} =V _{GS} ,I _D =250uA	2.0	—	4.0	V
Drain-Source On-State Resistance	R _{DS(on)}	V _{GS} =10V,I _D =5.5A	—	0.165	0.19	Ω
Dynamic Characteristics						
Input Capacitance	C _{iss}	V _{DS} =25V,V _{GS} =0V, f=1.0MHZ	—	1661	—	pF
Output Capacitance	C _{oss}		—	113	—	pF
Reverse Transfer Capacitance	C _{rss}		—	46	—	pF
Switching Characteristics						
Turn-On Delay Time	t _{d(on)}	V _{DD} =250V,I _D =15A, R _G =9.1 Ω	—	20	—	ns
Turn-On Rise Time	t _r		—	3	—	ns
Turn-Off Delay Time	t _{d(off)}		—	74	—	ns
Turn-Off Fall Time	t _f		—	9	—	ns
Total Gate Charge	Q _g	V _{DS} =400V,I _D =15A, V _{GS} =10V	—	25	—	nC
Gate-Source Charge	Q _{gs}		—	8	—	nC
Gate-Drain Charge	Q _{gd}		—	7.5	—	nC
Drain-Source Body Diode Characteristics and Maximum Ratings						
Continuous Diode Forward Current	I _S		—	—	20	A
Pulsed Diode Forward Current	I _{SM}		—	—	60	A
Diode Forward Voltage	V _{SD}	I _S =9A,V _{GS} =0V	—	—	1.5	V
Reverse Recovery Time	t _{rr}	V _{GS} =0V,I _S =15A,	—	92	—	ns
Reverse Recovery Charge	Q _{rr}	dIF/dt=100A/us,(Note3)	—	466	—	nC


Notes

1. Repetitive Rating: pulse width limited by maximum junction temperature.
2. L=10mH, R_g=25 Ω, V_{DD}=50V, starting T_J=25°C.
3. Pulse width ≤ 300μs; duty cycle ≤ 2%.


RATING AND CHARACTERISTIC CURVES

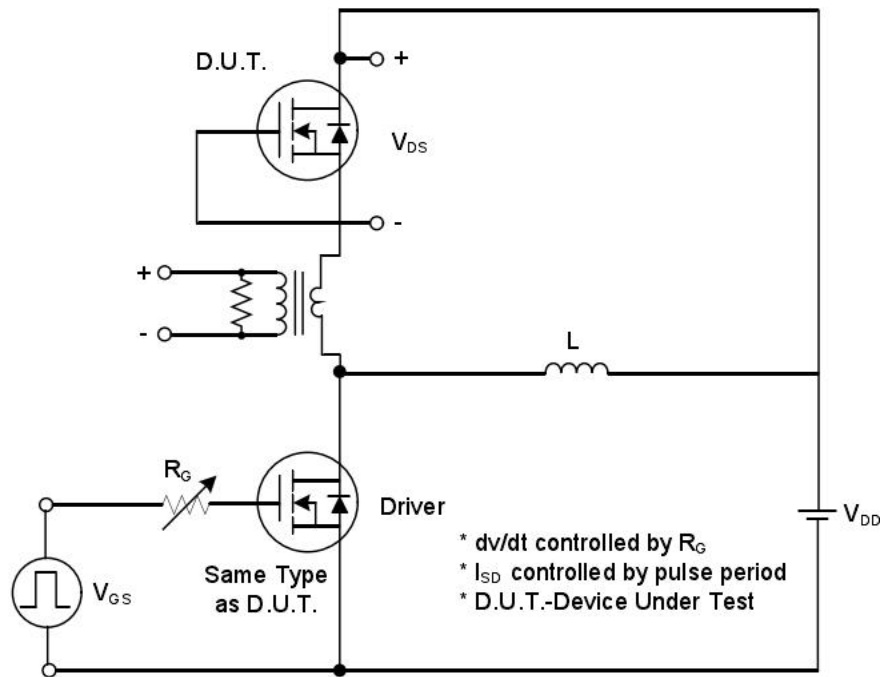


Peak Diode Recovery dv/dt Test Circuit

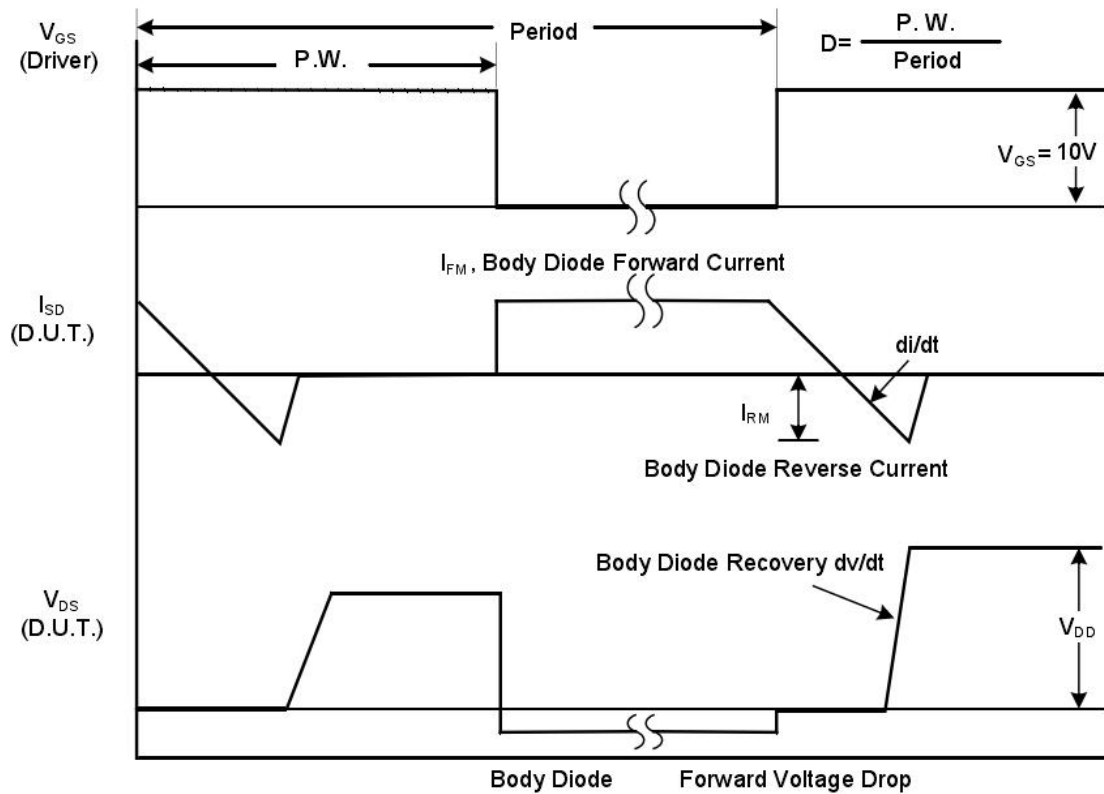


Peak Diode Recovery dv/dt Waveforms

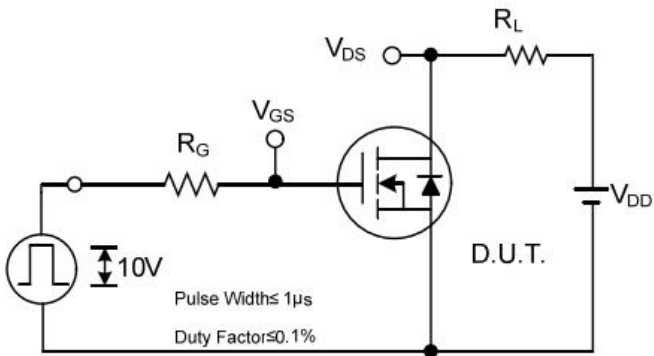


Switching Test Circuit

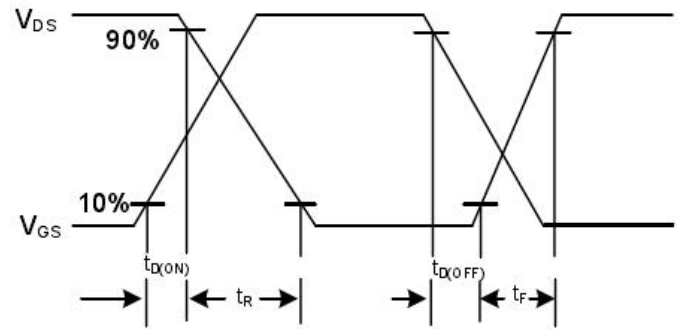


Switching Waveforms

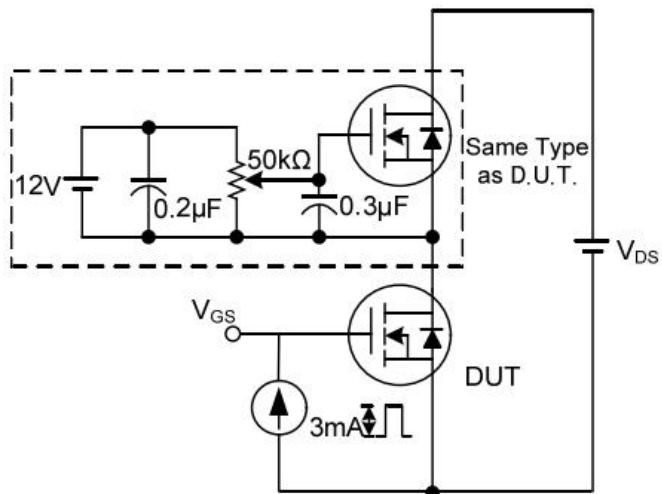


Gate Charge Test Circuit

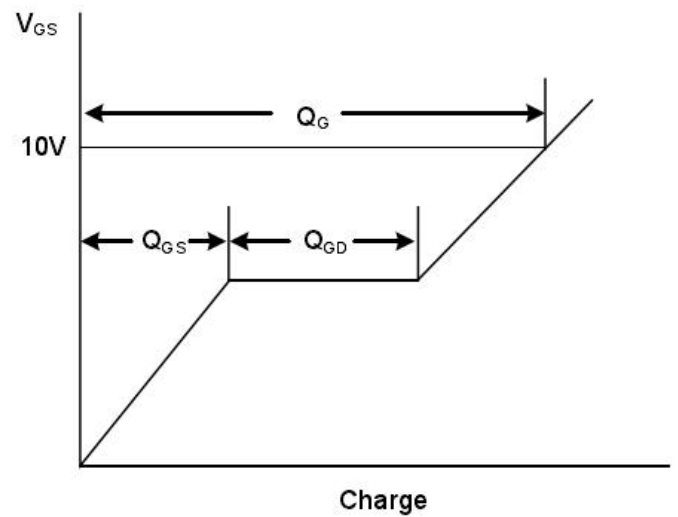

Gate Charge Waveform

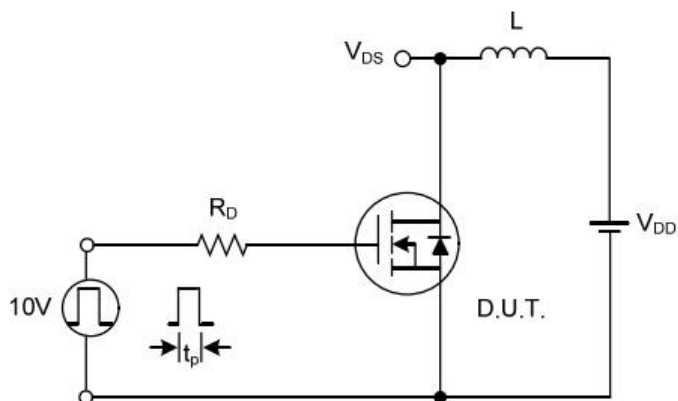

Unclamped Inductive Switching Test Circuit

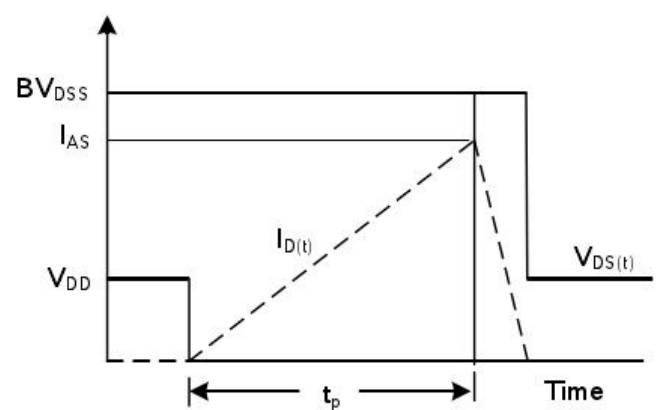

Unclamped Inductive Switching Waveforms

RATING AND CHARACTERISTIC CURVES

Figure.1 Typical Output Characteristics

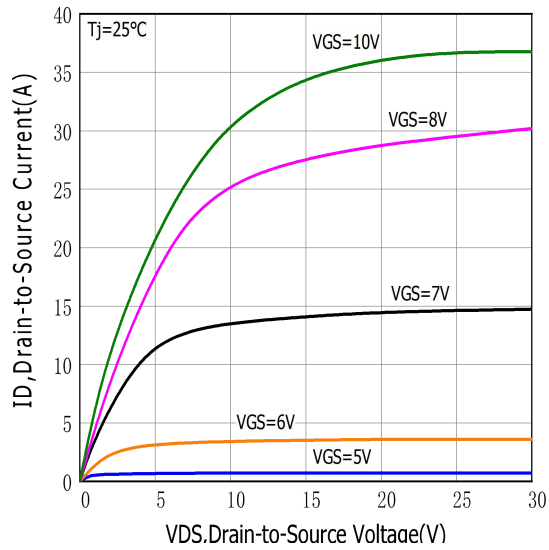


Figure.2 Typical Gate Charge vs Gate to Source Voltage

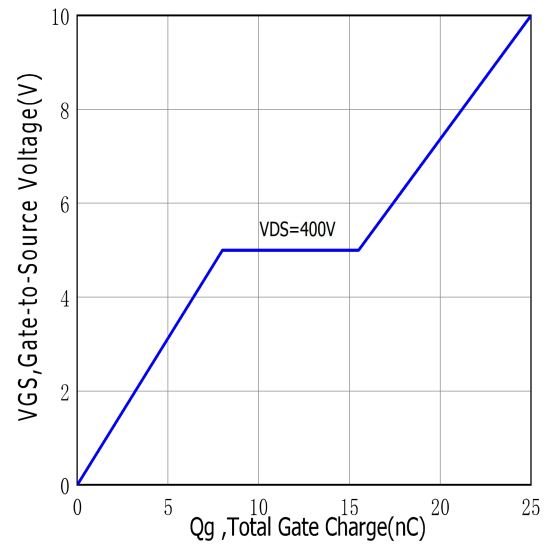


Figure.3 Typical Body Diode Transfer Characteristics

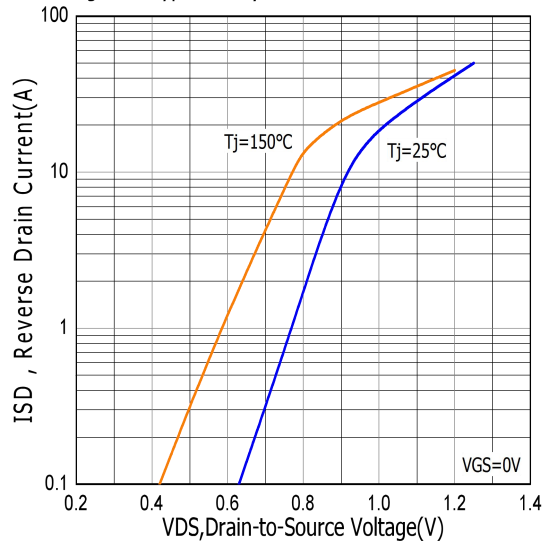


Figure.4 Typical Capacitance vs Drain to Source Voltage

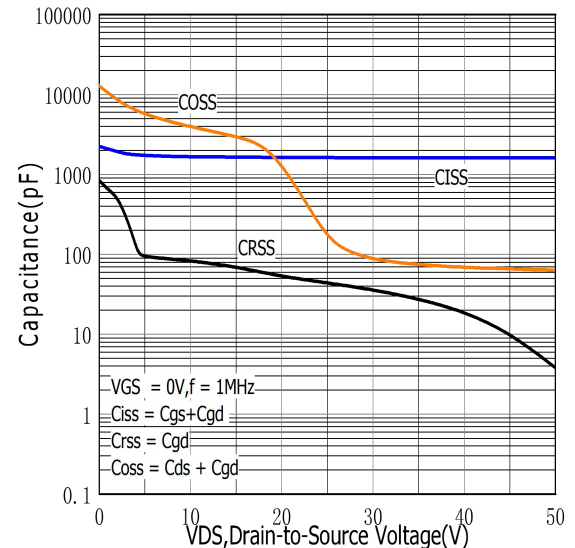


Figure.5 Typical Breakdown Voltage vs Junction Temperature

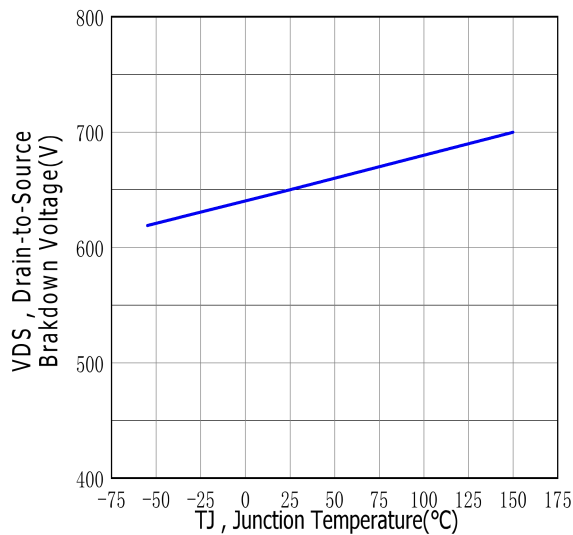


Figure.6 Typical Drain to Source on Resistance vs Junction Temperature

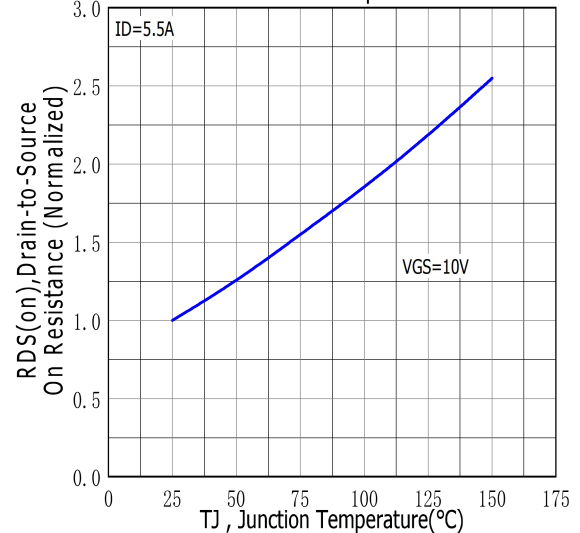


Figure.7 Maximum Forward Bias Safe Operating Area

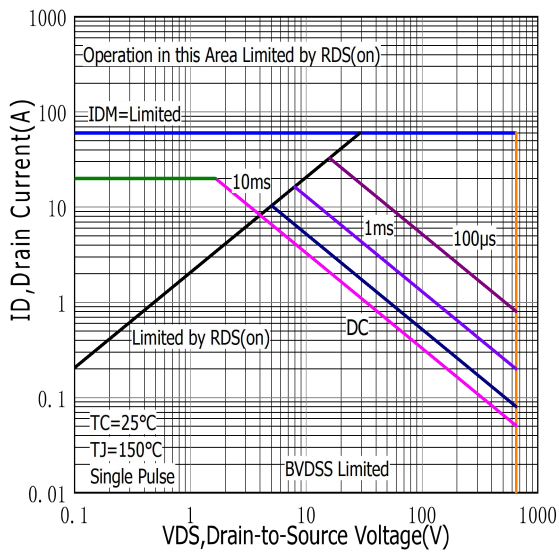


Figure.8 Typical Drain to Source ON Resistance vs Drain Current

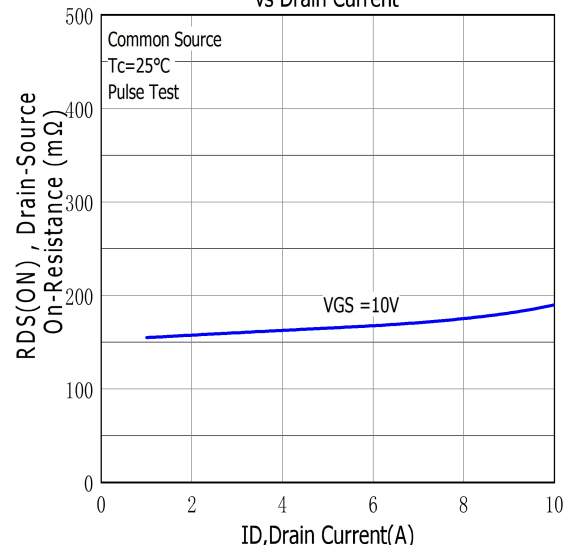


Figure.9 Maximum EAS vs Channel Temperature

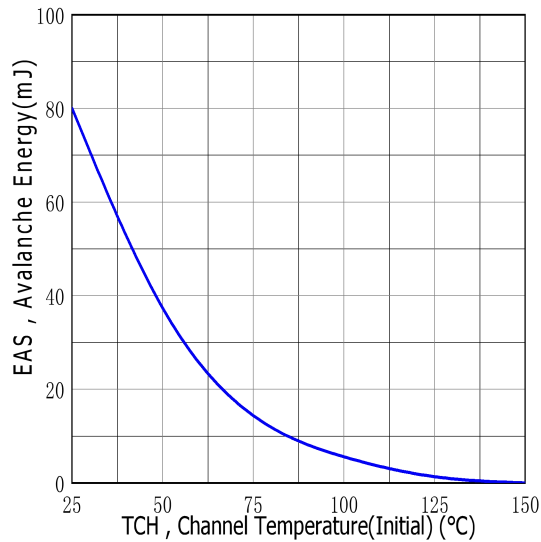


Figure.10 Typical Threshold Voltage vs Case Temperature

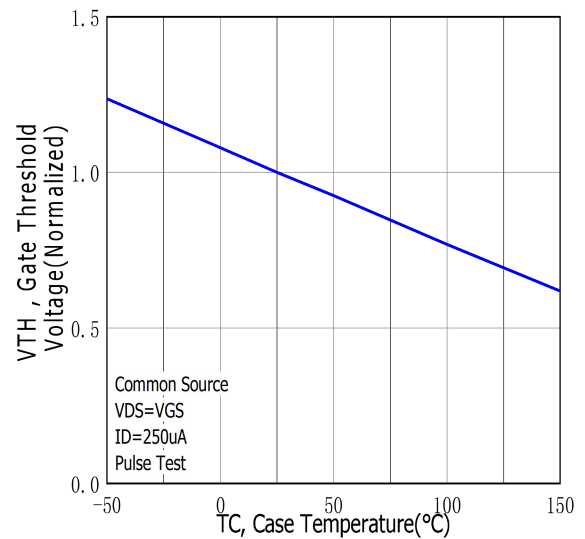


Figure.11 Maximum Effective Thermal Impedance, Junction to Case






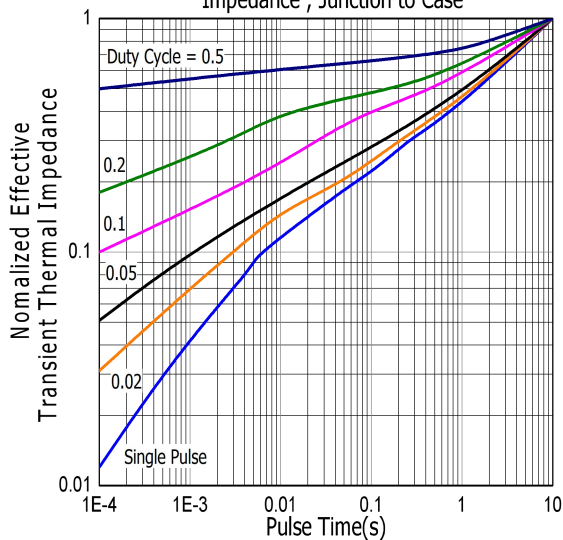



Figure.12 Maximum Power Dissipation vs Case Temperature

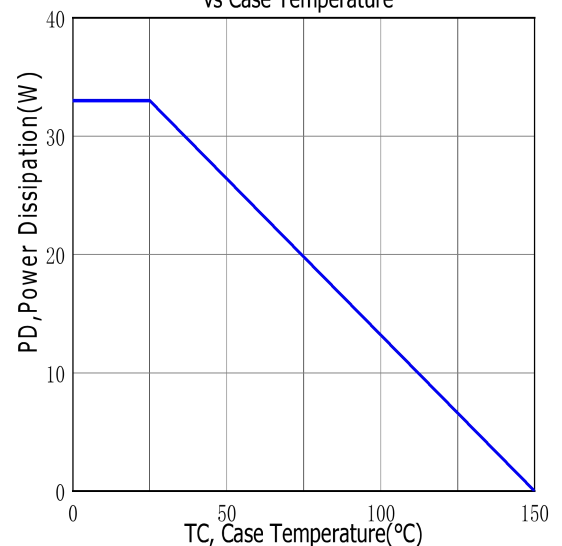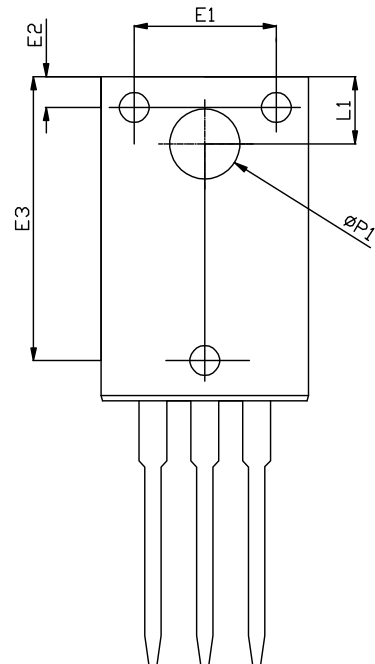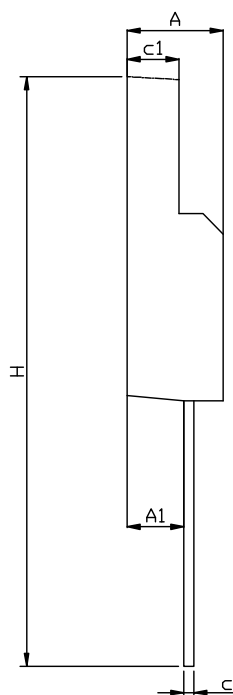

TO-220MF-3L PACKAGE OUTLINE

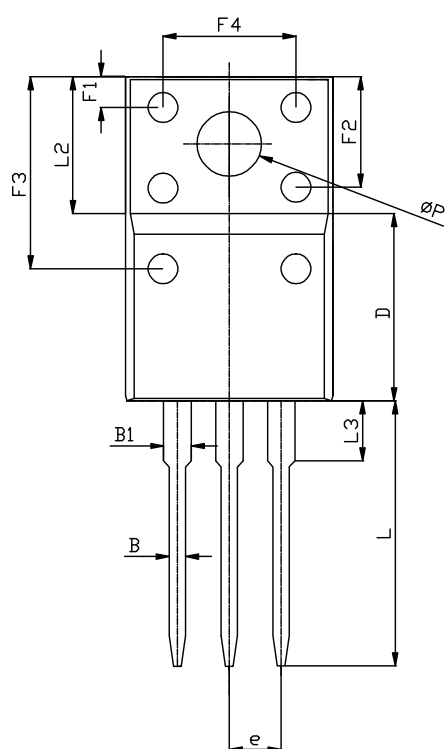

RECOMMENDED LAND PATTERN



UNIT:mm

	MIN	NOM	MAX
A	4.50	4.70	4.90
A1	2.63	2.76	2.89
B	0.75	0.80	0.90
B1	1.15	1.35	1.55
c	0.40	0.50	0.60
c1	2.34	2.54	2.74
D	8.87	9.17	9.47
e	-	2.54REF	-
E	9.86	10.16	10.46
E1	6.86	6.96	7.06
E2	1.40	1.50	1.60
E3	13.80	13.90	14.00
F1	1.40	1.50	1.60
F2	5.15	5.40	5.65
F3	9.10	9.40	9.70
F4	6.70	7.00	7.30
H	28.50	29.00	29.50
L	12.58	12.98	13.38
L1	3.15	3.30	3.45
L2	-	6.70REF	-
L3	2.63	2.93	3.23
ΦP	2.90	3.18	3.48
ΦP1	3.15	3.45	3.75